Cooking

BOSCH
Invented for life

Contents.

Ovens

Electric ovens, Gas ovens, Combination ovens, Microwaves, Steam ovens, Coffee maker and Warming drawers

Hobs

Electric hobs, Ceramic and induction hobs
Gas hobs and Domino hobs

Hoods

Island hoods, Wall-mounted hoods and Built-under hoods

Range of free-standing cookers

Great performance. Perfect symmetry. Designed for simplicity.

The new collection of Bosch built-in appliances has been designed to give you perfect symmetry in your home. Matching control panels and horizontal lines allow you to mix and match products vertically and horizontally. Every detail has been considered from the control panels, dials and knobs to the handles and door design.

Ovens.

Ovens
Features and benefits.

Performance

EU Energy Label

To help you choose the most energy efficient appliances, the EU has introduced an energy-rating scheme, whereby all ovens are required to display an EU Energy Label. The most efficient rating is 'A' and the least efficient is 'G', all Bosch single ovens have been awarded an A rating and all double ovens have an A/B rating.

Design

Metal behind glass

The new generation of Bosch ovens bring style and elegance to the kitchen. The new concept U-form door has a horizontal section of steel behind the outer glass for a unique, chic look.

Sleek new lines

Our new ovens combine the highest quality stainless steel and glass for a sleek and resistant finish. The ergonomically designed all-steel straight bar handle integrates perfectly with the door. And, matching control panels and horizontal lines allow you to mix and match different products vertically and horizontally for a completely coordinated look.

Enamel titanium coating

The grey enamel titanium interior coating is easy to clean and the lighter colour improves visibility of your dishes while cooking.

3 door constructions

Our range of single ovens are available with three different door constructions; drop-down, pullout and side opening, so that you can ensure the best solution for your kitchen environment and personal requirements.

Control panel

Fully programmable, the new twin display control panel is intuitive and simple to use. Selected models also feature clear text on the display screen.

Pop-out controls

Not only make the oven easy to operate but also they maintain a clean line when the oven is not in use, making the oven control panel easy to clean. Our top of the range models also have an illuminated red band.

Convenience

Pyrolytic self-cleaning system
The ultimate in self-cleaning power and convenience. During the pyrolytic self-cleaning cycle, the oven is heated to around 480°C, at this temperature any deposits are quickly reduced to a thin layer of ash, which can then be simply wiped away with a damp cloth to leave a completely clean oven.

Memory function
Store your favourite recipe instructions e.g. heating mode + temperature + cooking duration then simply press the memory button to repeat the sequence at any time.

Safety

Safer touch doors
Bosch oven doors are either double or triple glazed depending on the model, and ensure that the temperature of the door is always well within safety standards.

Child lock
Simply press the lock key for 4 seconds to disable all functions.

Automatic switch off
For extra peace of mind, if left unattended, the oven will switch off after a specific period of time. This additional safety feature is only available on electronic models. This can be over-ridden simply by periodically adjusting the temperature.

Temperature range	Automatic switch off after:
Under 101°C	72 hours
101 - 140°C	24 hours
141 - 200°C	6 hours
201 - 250°C	3 hours
251°C+	2 hours

Optional accessories

Fully extendable shelf rails
The height of convenience, telescopic shelf rails allow you to pull out the oven shelves to access an item without having to lift it out of the oven. Ideal for basting or tasting quickly and safely.

1. **Press the Auto Pilot key and select an automatic cooking programme**
2. **Specify how you would like it cooked i.e. rare**
3. **Input the weight**
4. **Press start**

Auto Pilot (10, 40, 68).

Imagine having a sous-chef working for you in your kitchen everyday? With Auto Pilot you can!

Simply place the dish in the oven, and then choose the appropriate automatic programme from the menu. There are 10, 40 or 68 recipes to choose from depending on the model.

Specify how you want your dish cooked. For example, if you are cooking roast beef would you prefer it rare, medium or well done?

Input the weight of the meat or fish and press start. Auto Pilot then takes over and determines the cooking mode, temperature and cooking duration.

Poultry, red meat, fish or stews, Auto Pilot will cook your dish to perfection. As Auto Pilot requires the use of ovenware with a lid your oven will stay clean too. Cooking with Bosch couldn't be simpler.

Prolytic self-cleaning function.

The ultimate in self-cleaning power and convenience. In a Pyrolytic self-cleaning cycle, the oven is heated to around 480°C. At that temperature any deposits are quickly reduced to a thin layer of ash, which can then be simply wiped away with a damp cloth to leave a completely clean oven. No need for detergents or back strain – nothing could be easier.

EcoClean function.

The highly effective automatic self-cleaning process called EcoClean is a world innovation. The oven's patented lining is made up of thousands of microscopic porous oxygen-filled ceramic spheres. When the oven heats up during the cooking process, oxygen is released from the spheres and causes any grease or waste deposits on the lining to break down or oxidize, leaving the oven liners sparkling clean. The rear wall is coated as standard; coatings are also available for the top and sides as optional extras.

Catalytic cleaning function.

The catalytic cleaning aid initiates the cleaning process during baking and roasting. The inner walls of the oven must feature special enamel plates. The enamelling is interspersed with so-called catalytic particles which cause predominantly fat deposits to be distributed over the enamel at temperatures from 180°C. The catalytic plates must not be treated with oven spray, abrasive cleaning agents, stiff brushes or cotton waste. They should be cleaned with a soft sponge soaked in washing-up liquid.

Cooking functions.

Multi-function cooking provides a solution for all your cooking requirements. With a choice of up to 13 different cooking functions, from traditional heating systems to more specialised functions such as Pizza setting, a Bosch oven will provide you with the flexibility to prepare a variety of meals for you and your family.

3D Hot Air Plus
The element around the fan distributes the heat quickly and evenly throughout the oven for same temperature cooking on three levels. Sweet and savoury items can be cooked at the same time. At higher temperatures (200-220°C) the effect is to evenly grill on three levels – with no turning of the food required.

Conventional heat
Employs both the upper and lower heating elements. The heat travels to the centre of the oven by natural convection, which is the best position to obtain the selected temperature. Most foods can be cooked using this system, but it is best suited to foods which require a dark crisp finish or long slow cooking.

Bottom heat
Only the bottom element is used to generate heat. This method is ideal for reheating or for when a crisp underside is required such as pizza bases and pastry cases.
It can also be used for drying herbs and bain-marie cooking.

Full width variable grill
Enables you to grill large quantities with precise temperature control. For added efficiency grilling is performed with the oven door closed.

Half width variable grill
On selected ovens you have the option to select just the centre section of the grill element as an economical way to grill smaller quantities of food.

Hot air grilling
An ideal cooking method for meat and poultry where a rotisserie effect is desired. The grill and fan operate alternately, which results in even crisp food and can use up to 50% less energy than traditional roasting.

Defrost
Perfect for gently defrosting meat, poultry, bread, cream cakes and much more.

Pizza setting
Designed with the pizza-lover in mind, but equally useful for quiches and tarts, this innovative function delivers cooking power for a perfectly crisp, browned base while keeping the topping moist. Suitable also for frozen food, and in many cases no preheating is required.

Keep warm setting
This convenient function keeps food items warm at temperatures between 66°C and 100°C at the touch of a button.

Preheating
Food stays warm for longer if served up in preheated ovenware. Plate warming allows you to preheat porcelain ovenware to between 30°C to 65°C.

Low temperature cooking
Ideally suited for keeping high quality pan-fried meat at the desired level of rareness or otherwise for an extended period of time without it spoiling. Juices and textures are retained whilst you get on with preparing the rest of the dinner.

Intensive heat
This time-saver delivers immediate intense heat from below, which is particularly effective for foods with a crispy base such as pizza. It makes it unnecessary to preheat the oven when baking cakes and quiches, and is also ideal for baking with tin, glass or porcelain moulds, which tend to reflect heat or are poor conductors of heat.

Conventional Baking
Breads, pastries and cakes benefit from a more moist cooking environment.Therefore, this setting retains moisture created during cooking, preventing your baking from drying out.

Built-in
Ovens
Conventional electric ovens

HBX53R50

- Full glass inner door
- Smooth oven interior
- Catalytic back and sides liners
- 1 level telescopic shelf
- Multifunction oven with 8 cooking functions: conventional heat, hot air, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Large capacity oven (66 lts.)
- Integral cooling fan
- Electronic clock
- Oven interior light with two lamps
- Oven interior light
- Fast heat up function
- Light design red and red
- Retractable controls
- Grey enamel oven interior
- Handle with professional look
- Maximum window temperature 50° C
- Cable with plug (2.30 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3550
- Dimensions of the product (mm): 474 x 894 x 545
- Required niche size for installation (HxWxD): 460 x 860 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

HBL3552

- Multifunction oven
- 90 cm wide
- Maximum window temperature 50° C
- Electronic clock
- Oven interior light with two lamps
- Cable (2.30 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 2900
- Dimensions of the product (mm): 474 x 894 x 545
- Required niche size for installation (HxWxD): 460 x 860 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid

HBA78B750

- Pyrolytic self-cleaning function
- Multifunction oven with 13 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting, intensive heat, preheating, low temperature cooking
- Accurate temperature control 30-300° C
- One-knob control
- Clear text display
- Automatic roasting function-AutoPilot 68
- Electronic hints for dishes
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Safety switch-off func oven
- Child lock function: oven door can be locked
- Maximum window temperature 40° C
- Full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- Softlight
- Full glass inner door
- Grease and odour filter as optional accessory
- Integral cooling fan: Yes
- Folder with recipes and hints
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
pyrolytic cleaning
1 x combination grid
1 x universal pan
pyrolytic cleaning

Built-in
Ovens
Conventional electric ovens

HBA76B650

- Pyrolytic self-cleaning function
- Multifunction oven with 10 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting
- Accurate temperature control 30-300° C
- One-knob control
- Electronic function selector with Digital display
- Automatic roasting function-AutoPilot 40
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock function: oven door can be locked
- Maximum window temperature 40° C
- Full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- Full glass inner door
- Grease and odour filter as optional accessory
- Integral cooling fan: Yes
- Recipe book
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
pyrolytic cleaning
1 x combination grid
1 x universal pan
pyrolytic cleaning

HBA73B550

- Pyrolytic self-cleaning function
- Multifunction oven with 8 cooking functions: conventional heat, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Accurate temperature control 50-300° C
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock
- Maximum window temperature 50° C
- Pop-out controls
- Electronic clock
- Oven interior light
- Full glass inner door
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
pyrolytic cleaning
1 x combination grid
1 x universal pan
pyrolytic cleaning

HBL36B650

- Ecoclean as optional accessory
- Multifunction oven with 10 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting
- Accurate temperature control 30-300° C
- One-knob control
- Electronic function selector with digital display
- Automatic roasting function-AutoPilot 40
- Extra large capacity oven with grey enamel
- side opening door, hinge left
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock
- Maximum window temperature 40° C
- Full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- Full glass inner door
- Grease and odour filter as optional accessory
- Drop down grill
- Integral cooling fan: Yes
- Recipe book
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

Built-in
Ovens
Conventional electric ovens

HBR36B650

- Ecoclean as optional accessory
- Multifunction oven with 10 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting
- Accurate temperature control 30-300° C
- One-knob control
- Electronic function selector with digital display
- Automatic roasting function-AutoPilot 40
- Extra large capacity oven with grey enamel
- Right-hand
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock
- Maximum window temperature 40° C
- Full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- Full glass inner door
- Grease and odour filter as optional accessory
- Drop down grill
- Integral cooling fan: Yes
- Recipe book
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

HBA38B750

- Ecoclean as optional accessory
- Multifunction oven with 13 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting, intensive heat, preheating, low temperature cooking
- Accurate temperature control 30-300° C
- One-knob control
- Clear text display
- Automatic roasting function-AutoPilot 68
- Electronic hints for dishes
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock
- Maximum window temperature 40° C
- full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- SoftLight
- Full glass inner door
- Grease and odour filter as optional accessory
- Drop down grill
- Integral cooling fan: Yes
- Folder with recipes and hints
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

HBA36B650

- Ecoclean as optional accessory
- Multifunction oven with 10 cooking functions: conventional heat, conventional baking, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost, keep warm setting
- Accurate temperature control 30-300° C
- One-knob control
- Electronic function selector with digital display
- Automatic roasting function-AutoPilot 40
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Safety switch-off function oven
- Child lock
- Maximum window temperature 40° C
- Full metal illuminated retractable controls
- Electronic clock
- Oven interior light with two lamps (optionally to be switched-off)
- Oven interior light to be switched-off
- Oven interior light
- Full glass inner door
- Grease and odour filter as optional accessory
- Drop down grill
- Integral cooling fan: Yes
- Recipe book
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3650
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

Built-in
Ovens
Conventional electric ovens

HBB33C550

- Catalytic back liner
- Multifunction oven with 8 cooking functions: conventional heat, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Extra large capacity oven with grey enamel
- Oven carriage
- Automatic rapid heating up
- Child lock
- Maximum window temperature 50° C
- Pop-out controls
- Electronic clock
- Oven interior light
- Full glass inner door
- Drop down grill
- Integral cooling fan: Yes
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3500
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

HBA34B550

- Catalytic back liner
- Multifunction oven with 8 cooking functions: conventional heat, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Automatic roasting function
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Child lock
- Maximum window temperature 50° C
- Pop-out controls
- Electronic clock
- Oven interior light
- Full glass inner door
- Drop down grill
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3500
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

HBA33B550

- Catalytic back liner
- Multifunction oven with 8 cooking functions: conventional heat, hot air plus, pizza setting, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Child lock
- Maximum window temperature 50° C
- Pop-out controls
- Electronic clock
- Oven interior light
- Full glass inner door
- Drop down grill
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3500
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x combination grid
1 x universal pan

Built-in
Ovens
Conventional electric ovens

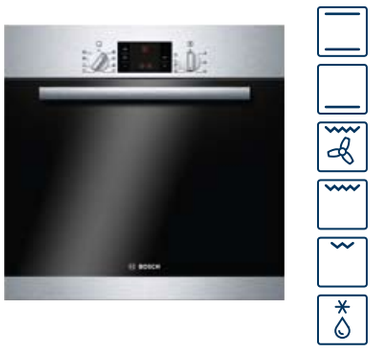

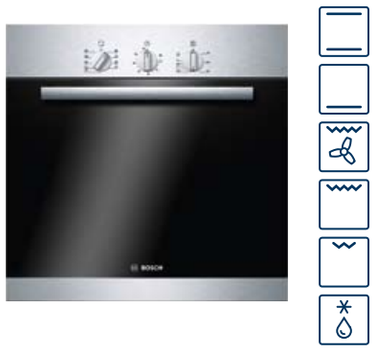

HBA23B150E

- Catalytic back liner
- Multifunction oven: 7 cooking functions: conventional heat, circulated air, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Grey interior enamel
- Automatic rapid heating up
- Child lock
- Electronic clock
- Oven interior light
- Full glass inner door
- Drop down grill
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (0.95 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3580
- Dimensions of the product (mm): 595 x 595 x 515
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x alu baking tray
1 x combination grid
1 x universal pan

HBA24B150

- Multifunction oven: 5 cooking functions: conventional heat, hot air plus, bottom heat, hot air grilling, full width variable grill
- Automatic roasting function
- Extra large capacity oven with grey enamel
- Automatic rapid heating up
- Child lock
- Pop-out controls
- Electronic clock
- Oven interior light
- Full glass inner door
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (1.20 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 3500
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x combination grid
1 x universal pan

HBA21B150E

- Catalytic back liner
- Multifunction oven: 7 cooking functions: conventional heat, circulated air, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Grey interior enamel
- Fast heat
- Minute minder
- Oven interior light
- Full glass inner door
- Drop down grill
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable with plug (0.95 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 2480
- Dimensions of the product (mm): 595 x 595 x 515
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x alu baking tray
1 x combination grid
1 x universal pan

Built-in
Ovens
Conventional electric ovens

HBA20B450E

- Multifunction oven: 7 cooking functions: conventional heat, circulated air, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Grey interior enamel
- Fast heat
- Pop-out controls
- Oven interior light
- Full glass inner door
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable (0.95 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 2480
- Dimensions of the product (mm): 595 x 595 x 515
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x combination grid
1 x universal pan

HBA20B420E

- Multifunction oven: 7 cooking functions: conventional heat, circulated air, bottom heat, hot air grilling, full width variable grill, half width variable grill, defrost
- Grey interior enamel
- Fast heat
- Pop-out controls
- Oven interior light
- Full glass inner door
- Integral cooling fan: Yes
- Telescopic shelf rails as optional accessory
- Cable (0.95 m)

TECHNICAL INFORMATION

- Electrical connection rating (W): 2480
- Dimensions of the product (mm): 595 x 595 x 515
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x combination grid
1 x universal pan

HBN531E0

- Heating system Multifunction 3D
- Catalytic cleaning
- Fast heat
- Child lock
- Electronic clock
- Oven interior light
- Glass inner door
- Telescopic shelf rails as optional accessory
- Cable 1,20 m with plug

TECHNICAL INFORMATION

- Electrical connection rating (W): 3600
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x alu baking tray
1 x universal pan
1 x combination grid

Built-in
Ovens
Conventional electric ovens

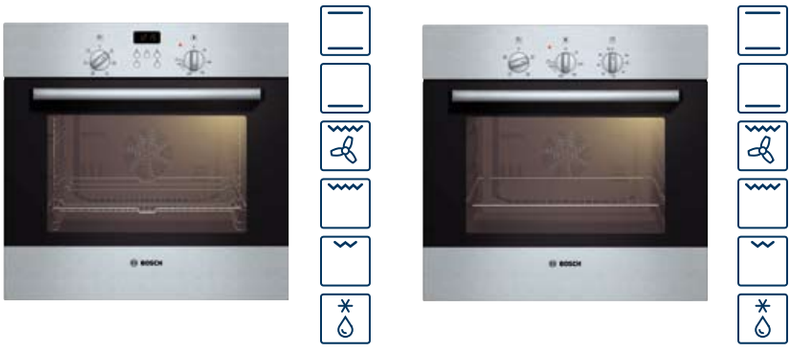

HBN231E0

- Multifunction heating system
- Child lock
- Electronic clock
- Oven interior light
- Telescopic shelf rails as optional accessory
- Cable with plug

TECHNICAL INFORMATION

- Electrical connection rating (W): 2800
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x alu baking tray
1 x universal pan
1 x combination grid

HBN210E0

- Multifunction heating system
- Extra large capacity oven with grey enamel
- Minute minder
- Oven interior light
- Cable 1.20 m with plug

TECHNICAL INFORMATION

- Electrical connection rating (W): 2800
- Dimensions of the product (mm): 595 x 595 x 548
- Required niche size for installation (HxWxD): 575-597 x 560 x 550

INCLUDED ACCESSORIES

1 x universal pan
1 x combination grid

Built-in
Ovens
Conventional gas ovens

HBL6EI23

- Appliance colour: Stainless steel
- 3 Operating methods: Full-surface grill/ broiler, Max Rotisserie, Gas bottom heating
- Grill heating element: Electric 2.4 kW
- Oven burner with knob ignition
- Thermo electric safety device
- Cleaning system: Side walls with EcoClean
- Full glass inner door: Triple glazed door with heat reflective glass
- Oven light
- Oven capacity 60 lts.
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 2400
- Dimensions of the product (mm): 593 x 595 x 538
- Required niche size for installation (HxWxD): 600 x 600 x 600

INCLUDED ACCESSORIES

1 x deep pan
1 x wire shelf
1 x aluminum pastry plate

HBL6EW22

- Appliance colour: White
- 3 Operating methods: Max Rotisserie, Gas bottom heating, Full-surface grill/broiler
- Grill heating element: Electric 2.4 kW
- Oven burner with knob ignition
- Thermo-electric
- Cleaning system: Side walls with EcoClean
- Full glass inner door: 2 PC
- Oven light
- Oven capacity 60 lts.
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 2400
- Dimensions of the product (mm): 593 x 595 x 538
- Required niche size for installation (HxWxD): 600 x 600 x 600

INCLUDED ACCESSORIES

1 X deep pan
1 x wire shelf
1 x aluminium pastry plate

Compact ovens and microwaves Features and benefits.

Performance

EU Energy Label

To help you choose the most energy efficient appliances, the EU has introduced an energy-rating scheme, selected compact appliances are required to display an EU Energy Label. The most efficient rating is 'A' and the least efficient is 'G', all relevant Bosch compact appliances have been awarded an A rating.

Design

Metal behind glass

The new generation of Bosch compact ovens bring style and elegance to the kitchen. The new concept U-form door has a horizontal section of steel behind the outer glass for a unique chic look.

Sleek new lines

Our new compact ovens combine the highest quality stainless steel and glass for a sleek and resistant finish. The ergonomically designed all-steel straight bar handle integrates perfectly with the door. And, coordinating control panels and horizontal lines allow you to mix and match vertically with different products and horizontally with compact models for a completely coordinated look.

Control panel

Fully programmable, the new control panels are intuitive and simple to use. Selected models also feature clear text on the display screen.

Pop-out controls

They not only make the oven easy to operate, but also maintain a clean line when the oven is not in use, making the oven control panel easy to clean. Our top of the range models also have an illuminated red band.

Steam ovens.

Convenience

Pyrolytic self-cleaning system
The ultimate in self-cleaning power and convenience. During the pyrolytic self-cleaning cycle, the oven is heated to around 480°C, at this temperature any deposits are quickly reduced to a thin layer of ash, which can then be simply wiped away with a damp cloth to leave a completely clean oven.

Automatic programming
Simply select the appropriate programme, enter the weight and press start. The automatic programme then takes over to cook your dish to perfection.

Memory function
Store your favourite recipe instructions e.g. heating mode + temperature + cooking duration then simply press the memory button to repeat the sequence at any time.

Safety

Safer touch doors
Bosch compact oven doors are either double or triple-glazed depending on the model, ensuring that the temperature of the door is always well within safety standards.

Child lock
Simply press the lock key for 4 seconds to disable all functions.

Steam cooking is accepted as the most gentle and healthy heating method available.

Better for you
Steaming helps to retain the vitamins and minerals in foods, which dissolve when immersed in water. In fact, compared with boiling, steam cooking retains almost 50% more of the vitamin and mineral content.

Better-looking and tastier food
The gentle heat action of steaming not only preserves the flavour, colour and aroma of the food but also maintains the form and texture. As the food retains it natural juices and does not dry out.

Large 1.3 litre water tank
Direct connection to a water pipe is not necessary as our ovens feature a removable water tank, which is simple and easy to refill.

Built-in
Ovens
Combination ovens

Built-in
Ovens
Steam oven

HBC86P753

- Pop-out controls rotary control full metal
- Large digital display for displaying cooking times and time of day
- Capacity 42 lts.
- Heating modes stage cooking: yes
- Clear text display: Yes
- Memory-function (6 settings)
- 70 automatic programming
- Minute timer, automatic fast heat up function, Key button, Start delay
- Child lock, Safety switch-off function oven
- 1000 W Microwave
- 5 settings: 1000 W, 600 W, 360 W, 180 W, 90 W
- Microwave stage cooking: yes
- With inverter technology
- Top/bottom heat, Circulating air, Hot air, Fan air grill system, Microwave, Combined operation, Bottom heating, Intensive heat, gentle cooking, warming, pre-heating, full width variable grill, half width variable grill
- Combined operation, gentle cooking, warming, pre-heating
- Can be built-in a 60 cm wall cupboard (at least 30cm deep)
- Out put power 3.6 kW
- Power cord with plug 180 cm
- Pyrolytic self-cleaning function

TECHNICAL INFORMATION

- Dimensions of the product (mm): 454 x 595 x 531
- Required niche size for installation (HxWxD): 450 x 560 x 550

INCLUDED ACCESSORIES

1 x glass pan
1 x combination grid
1 x universal pan

HBC86K753

- Pop-out controls rotary control full metal
- Large digital display for displaying cooking times and time of day
- Capacity 42 lts.
- Heating modes stage cooking: yes
- Clear text display: Yes
- Memory-function (6 settings)
- Minute timer, automatic fast heat up function, Key button, Start delay
- Child lock, Safety switch-off function oven
- 900 W Microwave
- 5 settings: 900 W, 600 W, 360 W, 180 W, 90 W
- Microwave stage cooking: yes
- With Inverter technology
- Top/bottom heat, Circulating air, Hot air, Fan air grill system, Microwave, Combined operation, Bottom heating, Intensive heat, gentle cooking, warming, pre-heating, full width variable grill, half width variable grill
- Combined operation, gentle cooking, warming, pre-heating
- Can be built-in a 60 cm wall cupboard (at least 30cm deep)
- Out put power 3.6 kW
- Power cord with plug 180 cm
- Cooking compartment surface: Enamel
- Catalytic cleaning: Roof, rear wall

TECHNICAL INFORMATION

- Dimensions of the product (mm): 454 x 595 x 531
- Required niche size for installation (HxWxD): 450 x 560 x 550

INCLUDED ACCESSORIES

1 x combination grid
1 x universal pan

HBC36D753

- Colour display: red
- Rotary Control, Knobs illuminated, Start button, full metal, round, Pop-out controls
- With shelf support rails, 4 PC slide-in level and Cavity volume: 32 lts.
- Full glass inner door
- Heating-up control, memory function, automatic temperature proposal, actual temperature display, automatic programming, automatic boiling point detection, descaling programme, cleaning help
- Steam 100% 35 °C till 100 °C, Hot Air 30 °C till 230 °C, Hot air + steam 120 °C till 230 °C,
- Automatic programming 70
- Inside cavity
- Water tank with 1.3 lts.
- Water Level Indicator Yes
- Child lock, Safety switch-off function oven
- Connecting cable with plug, 180 cm
- Construction type: built-in
- Total connected load electric: 1.9 kW
- Cleaning help; Full glass inner door

TECHNICAL INFORMATION

- Electrical connection rating (W): 1900
- Dimensions of the product (mm): 454 x 594 x 550
- Required niche size for installation (HxWxD): 450 x 560 x 550

INCLUDED ACCESSORIES

1 x STS tray-GN1/3-punched-40 mm deep
1 x STS tray-GN1/3-unpunched-40 mm deep
1 x STS tray-GN2/3-punched-40 mm deep
1 x STS tray-GN2/3-unpunched-28 mm deep
1 x grid

Built-in
Ovens
Steam oven

HBC26D553

- Colour display: red
- Rotary Control, Knobs illuminated, Start button, full metal, round, Pop-out controls
- With Shelf support rails, 4 PC slide-in level and Cavity volume: 35 lts.
- Full glass inner door
- Memory function, heating-up control, automatic temperature proposal, automatic programming, actual temperature display, automatic boiling point detection, cleaning help, descaling programme
- Automatic programming 40
- Inside cavity
- Water tank with 1.3 lts.
- Water Level Indicator Yes
- Child lock, Safety switch-off function oven
- Connecting cable with plug: 180 cm
- Construction type: built-in
- Total connected load electric: 1.9 kW
- Cleaning help; Full glass inner door

TECHNICAL INFORMATION

- Electrical connection rating (W): 1900
- Dimensions of the product (mm): 454 x 594 x 550
- Required niche size for installation (HxWxD): 450 x 560 x 550

INCLUDED ACCESSORIES

1 x STS tray-GN2/3-unpunched-40 mm deep
1 x STS tray-GN2/3-punched-40 mm deep
1 x grid

Built-in
Ovens
Microwave

HMT35M653

- Pop-out controls rotary control
- Large digital display for displaying cooking times and time of day
- Capacity 36 lts. Stainless steel
- 9 automatic programming
- 1000 W Microwave
- 5 settings: 1000 W, 600 W, 360 W, 180 W, 90 W
- Microwave stage cooking: yes
- With Inverter technology
- Can be built-in a 60 cm wall cupboard (at least 30 cm deep)
- Output power 1.22 kW
- Power cord with plug 150 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 454 x 595 x 563
- Required niche size for installation (HxWxD): 450 x 560 x 550

HMT85GL53

- Side opening door with large viewing window, Left-hand hinged
- Display colour: red
- Ceramic bottom
- Microwave stage cooking: yes
- LED Display
- 10 automatic programming
- 3 defrost programs
- 4 cooking programs
- 10 combi programs
- With inverter technology
- Memory-function (2 settings)
- Large digital display for displaying cooking times and time of day
- 900 W Microwave
- 5 settings: 900 W, 600 W, 360 W, 180 W, 90 W
- Combination of Grill and Microwave power levels 360/180/90 W
- 1300 W, 3 power levels
- Capacity 21 lts. Stainless steel
- Can be built-in a 60 cm wall cupboard (at least 30 cm deep)
- Output power 1.99 kW
- Power cord with plug 150 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 382 x 595 x 320
- Required niche size for installation (HxWxD): 362-365, 380 x 560 x 300

INCLUDED ACCESSORIES

1 x glass pan
1 x grid

Built-in
Ovens
Microwave

HMT85GR53

- Side opening door with large viewing window, Right-hand hinged
- Display colour: red
- Ceramic bottom
- Microwave stage cooking: yes
- LED Display
- 10 automatic programming
- 3 defrost programs
- 4 cooking programs
- 10 combi programs
- With inverter technology
- Memory-function (2 settings)
- Large digital display for displaying cooking times and time of day
- 900 W Microwave
- 5 settings: 900 W, 600 W, 360 W, 180 W, 90 W
- Combination of Grill and Microwave power levels 360/180/90 W
- 1300 W, 3 power levels
- Capacity 21 lts. Stainless steel
- Can be built-in a 60 cm wall cupboard (at least 30cm deep)
- Output power 1.99 kW
- Power cord with plug 150 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 382 x 595 x 320
- Required niche size for installation (HxWxD): 362-365, 380 x 560 x 300

INCLUDED ACCESSORIES

1 x glass pan
1 x grid

HMT84G651

- Can be built-in a 60 cm wall cupboard (at least 30 cm deep)
- User-friendly electronics with push buttons and pop-out control.
- 900 W Microwave
- 5 settings: 900 W, 600 W, 360 W, 180 W, 90 W
- Grill 1200 W
- Combination of Grill and Microwave power levels 360/180/90 W
- 8 automatic programming
- 4 defrost programs
- 3 cooking programs
- 8 combi programs
- Memory-function (1 setting)
- Large digital display for displaying cooking times and time of day
- Side opening door with large viewing window, Left-hand hinged
- Capacity 25 lts. Stainless steel
- Turn table 31.5 cm Glass
- Output power 1.45 kW
- Power cord with plug 130 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 280 x 513 x 405
- Required niche size for installation (HxWxD): 380 x 560 x 550

HMT84M651

- Can be built-in a 60 cm wall cupboard (at least 30 cm deep)
- User-friendly electronics with push buttons and pop-out control.
- 900 W Microwave
- 5 settings: 900 W, 600 W, 360 W, 180 W, 90 W
- 7 automatic programming
- 4 defrost programs
- 3 cooking programs
- Memory-function (1 setting)
- Large digital display for displaying cooking times and time of day
- Side opening door with large viewing window, Left-hand hinged
- Capacity 25 lts. Stainless steel
- Turn table 31.5 cm Glass
- Output power 1.45 kW
- Power cord with plug 130 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 280 x 513 x 405
- Required niche size for installation (HxWxD): 380 x 560 x 550

Built-in
Ovens
Microwave

HMT75M651

- Can be built-in a 60 cm wall cupboard (at least 30 cm deep)
- User-friendly electronics with push buttons and pop-out control.
- 800 W Microwave
- 5 settings: 800 W, 600 W, 360 W, 180 W, 90 W
- 7 automatic programming
- 4 defrost programs
- 3 cooking programs
- Memory-function (1 setting)
- Large digital display for displaying cooking times and time of day
- Side opening door with large viewing window, Left-hand hinged
- Capacity 17 lts. Stainless steel
- Turn table 24.5 cm Glass
- Output power 1.27 kW
- Power cord with plug 130 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 280 x 453 x 320
- Required niche size for installation (HxWxD): 362 x 560 x 300

Coffee maker.

SensoFlow heating system
Provides fast water heating and precise temperature control for improved taste and energy efficiency.

Aroma pressure system
Ensures optimum compression and extraction of ground coffee for a perfect tasting cup of coffee.

Fully automatic rinse programme
Each cup of coffee is freshly brewed every time. Pipes are automatically rinsed after use and any residual water is pumped away. Fresh water guarantees fresh coffee flavour and aroma every time.

Cream centre
An external insulated milk container supplies milk into the cream centre only when it is needed, so that the milk keeps fresher for longer. Giving you perfect milk froth and making it easier to clean.

One touch function for milk drinks
Allows you to store the settings for your favourite milk drink e.g. cappuccino, latte, white coffee so that you only have to press one button for your regular drink.

Warming drawers.

Plate warming
Food stays warm for longer if served up in preheated ovenware. Bosch warming drawers allow you to preheat porcelain ovenware to between 30°C to 80°C.

Hold warm
Not only can you heat-up your crockery with a Bosch warming drawer but you can also keep food hot for up to an hour.

DeFrost
Perfect for gently defrosting meat, poultry, bread, cream cakes and much more. Also ideal for defrosting nonsensitive foods.

Dough proving
The gentle heat of the warming drawer is the perfect environment for proving dough.

Built-in
Integrated coffee machine
Built-in Coffee Machine

60 cm

TCC78K750

- Wattage: 1700 W
- Front height 450.5 mm
- Innovative brewing technology with “AromaPro Concept”
- Innovative heating system “Senso Flow System”
- Reduced heating-up time: fastest first cup
- High-value ceramic grinding unit “Silent Ceramic Drive”
- High-value milk nozzle with suction function “CreamPro Concept”
- Comfortable quick rinsing of milk system “Cream Cleaner”
- Intelligent “auto valve system” switches automatically between steam & hot water function
- “One touch” function for: latte macchiato und cappuccino, milk coffee & personalized “My Coffee” function
- Single portion cleaning
- Individually adjustable temperatures for coffee (3 levels) & hot water (4 levels), individually adjustable grinding degree (4 levels)
- Early warning when bean container or water tank are close to empty
- Frothing nozzle for cappuccino and cafe latte
- High-quality LCD display; programmable languages
- Automatically rinses when switched on or off
- Fully automatic descaling & cleaning programme (combined programme “calc’n’clean”)
- Separate container for pre-grounded coffee
- Accessories: isolated milk container, connecting tube to milk nozzle, acrylic milk pipe, cleaning & descaling tablets, Brita water filter, water hardness test strip

Built-in
Warming Drawer

60 cm 29 cm

HSC290652

- Stainless steel
- Loading up to 25 kg
- Max. loading espresso cups: 120 PC or Max. loading plates: 40 PC
- Temperature control in 4 levels, ca. 30-80°C (glass surface temperature)
- Cool door
- Telescopic rails: Yes
- Bar handle
- Functions: - dough proving - thawing of delicate foods - keeping drinks and food warm - pre-warming of crockery - gentle cooking
- Easy to clean heated ceramic glass base
- Connection load 0.81 kW
- Length wire connection: 150 cm

TECHNICAL INFORMATION

- Electrical connection rating (W): 810.00
- Dimensions of the product (mm): 290 x 594 x 544
- Required niche size for installation (HxWxD): 290 x 560 x 550

60 cm 14 cm

HSC140652

- Stainless steel
- Loading up to 25 kg
- Max. loading espresso cups: 80 PC or Max. loading plates: 12 PC
- Temperature control in 4 levels, ca. 30-80°C (glass surface temperature)
- Cool door
- Telescopic rails: Yes
- Bar handle
- Functions: dough proving - thawing of delicate foods - keeping drinks and food warm - pre-warming of crockery - gentle cooking
- Easy to clean heated ceramic glass base
- Connection load 0.81 kW
- Length wire connection: 150 cm

TECHNICAL INFORMATION

- Electrical connection rating (W): 810.00
- Dimensions of the product (mm): 141 x 594 x 544
- Required niche size for installation (HxWxD): 141 x 560 x 550

Built-in
Warming Drawer

HSC140P51

- Stainless steel
- Loading up to 25 kg
- Max. loading espresso cups: 80 PC or Max. loading plates: 12 PC
- Temperature control in 4 levels, ca. 30-80°C (glass surface temperature)
- Cool door
- Telescopic rails: Yes
- Push & pull
- Functions: - dough proving - thawing of delicate foods - keeping drinks and food warm - pre-warming of crockery - gentle cooking
- Easy to clean heated ceramic glass base
- Connection load 0.81 kW
- Length wire connection: 150 cm

TECHNICAL INFORMATION

- Electrical connection rating (W): 810.00
- Dimensions of the product (mm): 141 x 594 x 544
- Required niche size for installation (HxWxD): 141 x 560 x 550

Hobs.

Electric hobs.

Electric hobs
Features and benefits.

Performance

Ceramic hob
With their electronic touch controls and flexible cooking zones, our ceramic hobs combine great looks with smart function and design. The smooth ceramic glass hob surface is tough and durable as well as being practical and easy to clean.

Induction hob
Induction technology is now widely recognised as one of the quickest, safest and most efficient methods of cooking available. It uses an electromagnetic field to instantly generate heat, giving you the control and responsiveness of gas, but with far more energy efficiency. Heat is only generated when the pan is placed on the hob – it stops as soon as the pan is removed – and while an induction hob cooks almost twice as quickly as a standard ceramic hob, and 40% quicker than gas, the ceramic glass of an induction hob does not get as hot as that of standard ceramic hobs, which makes for a safe and easy-to-clean cooking surface. The hob will only operate with pans with a ferrous (or magnetic) base.

Boost function
Increases the power output of the selected cooking zone by approximately 50% by 'borrowing' power from another zone. Note that when boost is selected for a particular zone, the partner zone contributing the power cannot be used.

Automatic pan recognition
The hob recognises the size of the pan and only heats up the base of the pan and not the whole zone, saving time and energy.

Memory function
Ideal for regularly prepared items where you always use identical volumes. This convenient function allows you to input the various times and temperatures used throughout the cooking process which can then be repeated at anytime. Up to 5 stages per memory setting. One memory setting per cook zone.

Automatic boil start
The cooking zone may be set to operate at full power for a period of time before reverting back to a pre-set power level.

Domino Hobs.

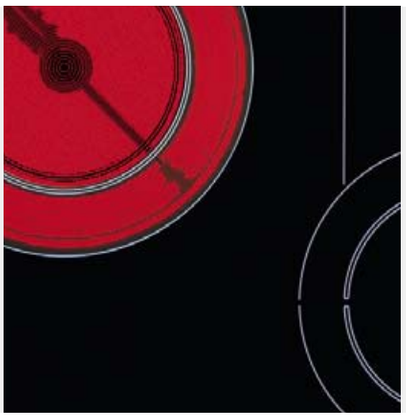

Convenience

DirectSelect
Simply selecting the required power level from those on offer (keys laid out on the hob) instead of having to press +/– keys repeatedly.

Freeze function
“Freezes” the control panel at its current settings to allow the surface to be wiped down (if something spills). Saves the user having to switch off the hob to clean it or risk disturbing the settings. Reverts back at the touch of the key or after approximately 20 seconds.

Dual ring cook zone
Available on selected hobs, this energy-saving feature allows you to select a smaller cook zone for small pans, and a larger zone for larger pans.

Extendable zone
The cooking zone can be extended giving you a much larger area to accommodate big saucepans, fish kettles and other special cooking dishes.

Timer
99-minute timer with acoustic tone, which automatically switches off the zone once the cooking time has come to an end.

Safety

2-stage residual heat display
Provides clear indication of when a zone is still hot after it has been turned off. There are two levels: ‘H’ – residual heat sufficient to finish off cooking or to keep items warm. ‘h’ – residual heat insufficient to cook, but zone is still hot enough for caution.

Child lock
Featured as standard on all touch control models, it prevents the hob from being inadvertently operated.

Main switch
Allows you to switch all cook zones off at the touch of a single button – ideal if the doorbell rings.

Safety switch off
If the hob is left unattended for an extended period of time, the safety shut off facility ensures the hob turns itself off.

With the Domino modular hobs, you have the freedom of designing your own cooking centre. Using a combination of gas, ceramic hob, wok burner or barbecue grill, these units can be built in separately or combined for the ultimate cooking experience.

Built-in
Hobs
Induction hobs



Built-in
Hobs
Ceramic hobs

PIK975N24E

- Facette front and rear, side profiles
- Can be combined with all hobs in comfort design
- 4 induction cooking zones
- 1 dual zone
- Direct Select
- Electronic regulation 17 power levels
- Timer with switch-off function for all zones
- Buzzer
- HighSpeed ceramic glass
- Control panel pause function
- Connection cable (1.5 M)
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- PowerManagement Function
- Main switch
- Electronic display
- FryingSensor Plus with frying sensor under the front right and left cooking zones 4 frying levels
- Boost function for all zones
- Power Boost function (4.4kW) for the 28cm diameter zone
- Min. worktop thickness: 20 mm
- Connection load: 10.8 kW

TECHNICAL INFORMATION

- Electrical connection rating (W): 10800
- Dimensions of the product (mm): 56.0 x 916 x 527
- Required niche size for installation (HxWxD): 50 x 880 x 490-500

NIB645E14E

- Frame design
- 4 induction cooking zones
- 1 automatic extendable zone
- Direct Select
- HighSpeed ceramic glass
- Connection cable (1.5 M)
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- PowerManagement Function
- Main switch
- Electronic display
- Boost function for all zones
- Min. worktop thickness: 30 mm
- Connection load: 7 kW

TECHNICAL INFORMATION

- Electrical connection rating (W): 7000
- Dimensions of the product (mm): 57.0 x 575 x 505
- Required niche size for installation (HxWxD): 53 x 560 x 490

PKV975N24D

- Facette front and rear, side profiles
- Can be combined with all hobs in comfort design
- 5 HighSpeed cooking zones
- 1 triple zone
- 1 dual zone
- 1 extendable triple zone
- HighSpeed ceramic glass
- Buzzer
- Timer with switch-off function for all zones
- Electronic regulation 17 power levels
- Zone extension activation with the knob
- Control panel pause function
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Electronic display
- Power on indicator light
- Main switch
- Direct Select
- Frying Sensor Plus for frying with FryingSensor under the front left zone
- Ceramic hob with automatic cooking
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 9450
- Dimensions of the product (mm): 50.0 x 916 x 527
- Required niche size for installation (HxWxD): 44 x 880 x 500

OPTIONAL ACCESSORIES

HEZ392900	Accessories electric cookers/ ovens

Built-in
Hobs
Ceramic hobs





PKN645E14

- Frame design
- 4 HighSpeed cooking zones
- 1 with extendable oval zone
- 1 dual zone
- Decorated HighSpeed ceramic glass
- Electronic regulation 17 power levels
- Zone extension activation with the knob
- TouchControl operating, Front control
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Electronic display
- Power-on indicator light
- Main switch
- Quick start function
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 7200
- Dimensions of the product (mm): 51.0 x 575 x 515
- Required niche size for installation (HxWxD): 47 x 560 x 500

PKB645E14

- Frame design
- 4 HighSpeed cooking zones
- 1 with extendable oval zone
- Decorated HighSpeed ceramic glass
- Electronic regulation 17 power levels
- Zone extension activation with the knob
- TouchControl operating, Front control
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Electronic display
- Power-on indicator light
- Main switch
- Quick start function
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 7200
- Dimensions of the product (mm): 51.0 x 575 x 515
- Required niche size for installation (HxWxD): 47 x 560 x 500

PKF645R14E

- 4 HighSpeed cooking zones
- 1 dual zone
- HighSpeed ceramic glass
- Timer with switch-off function for all zones
- Electronic regulation 17 power levels
- Zone extension activation with the knob
- Direct Select
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Electronic display
- Power-on indicator light
- Main switch
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 6600
- Dimensions of the product (mm): 51.0 x 575 x 505
- Required niche size for installation (HxWxD): 47 x 560 x 490

Built-in
Hobs
Ceramic hobs



PKE645E14

- Frame design
- 4 HighSpeed cooking zones
- Decorated HighSpeed ceramic glass
- Electronic regulation 17 power levels
- TouchControl operating, Front control
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Safety switch-off
- Electronic display
- Power-on indicator light
- Main switch
- Quick start function
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 6600
- Dimensions of the product (mm): 51.0 x 575 x 515
- Required niche size for installation (HxWxD): 47 x 560 x 500

PKN645C14

- Frame design
- 4 HighSpeed cooking zones
- 1 with extendable oval zone
- 1 dual zone
- Decorated HighSpeed ceramic glass
- Electronic regulation 9 power levels
- Zone extension activation with the knob
- Surface-mounted controls
- 2 stage residual heat indicator per cooking zone
- Power-on indicator light
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Electrical connection rating (W): 7000
- Dimensions of the product (mm): 51.0 x 576 x 518
- Required niche size for installation (HxWxD): 47 x 560 x 500

PKF375N14E

- Facette front and rear, side profiles
- Can be combined with 60, 70, 80 and 90 cm hobs
- 2 HighSpeed cooking zones
- 1 dual zone
- HighSpeed ceramic glass
- Timer with switch-off function for all zones
- Electronic regulation 9 power levels
- Zone extension activation with a Touch sensor
- Electric cable, without plug
- 2 stage residual heat indicator per cooking zone
- Safety switch-off
- Electronic display
- Main switch
- Direct Select
- Min. worktop thickness: 20 mm

TECHNICAL INFORMATION

- Dimension of the product (mm): 54 x 306 x 527
- Required niche size for installation (HxWxD): 48 x 270 x 490-500

Built-in
Hobs
Electric hobs

60 cm

NCT615C01

- Chrome nickel steel
- Surface-mounted controls
- 4 infinitely variable high-speed cooking zones
- Power-on indicator light

TECHNICAL INFORMATION

- Electrical connection rating (W): 7000
- Dimensions of the product (mm): 65.0 x 580 x 510
- Required niche size for installation (HxWxD): 45 x 560 x 490

30 cm

PCX345E

- 2 HighSpeed hotplates
- Power-on indicator light
- Minimum worktop thickness: 3 cm
- Total connection load: 3.5 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 2 m

TECHNICAL INFORMATION

- Appliance dimensions (HxWxD) 3.8 x 28.8 x 50.5 cm
- Built-in dimensions (HxWxD) 4.3 x 26.8 x 49.0 cm

30 cm

PKU375N14E

- Facette front and rear, side profiles
- Can be combined with 60, 70, 80 and 90 cm hobs
- Removable black glass lid
- HighSpeed ceramic glass
- TouchControl operating, Front control
- Electronic regulation 9 power levels
- Buzzer
- Stainless steel grill to be used with water or lava stones
- Electric cable, without plug
- Electronic display
- Safety switch-off
- Power-on indicator light
- Main switch
- Drain valve
- Direct Select
- 1 big grill zone on cast pan support
- Min. worktop thickness: 30 mm

TECHNICAL INFORMATION

- Dimension of the product (mm): 1 x 306 x 527
- Required niche size for installation (HxWxD): 235 x 270 x 490-500

Gas hobs.

Gas hobs
Features and benefits.

Design

New control dials
Dials match the design of our new range of ovens so that you can perfectly coordinate your kitchen.

Cast iron supports
Cast iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans whilst adding a strong contemporary look to your kitchen.

Performance

High-power wok-style burner
Selected gas hob models feature a powerful wok-style burner, which provides intense heat to the pan up to 6.0 kW. Suitable for use with flat-based pans or with a work using the pan craddle provided.

Flexible burners
All our gas hobs feature different burner combinations for greater flexibility. With high speed, normal and economy burners you can cook more efficiently with the correct sized burner for the size of pan.

Convenience

One hand ignition
Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand there is also no separate ignition button to clean.

Safety

Quick stop main switch
For added safety some of our gas hobs feature a main switch, which acts as both a safety lock and quick stop. By cutting off the gas supply to the burners the hob cannot be inadvertently activated. It also allows all four burners to be turned off quickly should the phone ring, for example.

Flame failure device
If the burner is accidentally extinguished the thermostat reacts and shuts off the gas supply to the burner.

Built-in
Hobs
Gas hobs



PRS926B90E

- 5 gas burners
- 1 dual wok burner
- 1 rapid, 2 standard, 1 economy burner
- Left: wok burner 6 kW
- Center front: Standard burner 1.9 kW
- Center rear: Economy burner 1.1 kW
- Rear right: Rapid burner 2.8 kW
- Front right: Standard burner 1.9 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1.5 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 57 x 916 x 527
- Required niche size for installation (HxWxD): 45 x 850 x 490

INCLUDED ACCESSORIES

1 x wok attachment ring

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PRH626B90E

- 4 gas burners
- 1 rapid, 1 standard, 1 economy burner, 1 wok burner
- Front left: Wok burner 2.85 kW
- Rear left: Economy burner 1.1 kW
- Rear right: Rapid burner 2.8 kW
- Front right: Standard burner 1.9 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 47 x 606 x 527
- Required niche size for installation (HxWxD): 45 x 560 x 490

INCLUDED ACCESSORIES

1 x wok attachment ring

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PRY626B90E

- 3 gas burners and 1 electric cooking zone
- 1 rapid, 1 standard, 1 economy burner, 1 electric cooking zone
- Front left: Dual-circuit zone 1.8 kW, 0.7 KW
- Rear left: Economy burner 1.1 kW
- Rear right: Rapid burner 2.8 kW
- Front right: Standard burner 1.9 kW
- Knob ignition via control knobs
- Flame failure safety device
- Residual heat display
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 2200
- Dimensions of the product (mm): 47 x 606 x 527
- Required niche size for installation (HxWxD): 45 x 560 x 490

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

Built-in
Hobs
Gas hobs

PRB326B90E

- 2 gas burners
- 1 rapid, 1 standard burner
- In front: Standard burner 1.9 kW
- Rear: High-speed burner 2.8 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included
- Can be combined with Domino glass ceramic hobs

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 52 x 306 x 527
- Required niche size for installation (HxWxD): 45 x 270 x 490-500

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PRA326B90E

- 1 dual wok burner
- Center: wok burner 6 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included
- Can be combined with Domino glass ceramic hobs

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 57 x 306 x 527
- Required niche size for installation (HxWxD): 45 x 270 x 490-500

INCLUDED ACCESSORIES

1 x wok attachment ring

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PCT915B90E

- 6 gas burners
- 2 standard, 2 economy, 2 wok burners
- Front left: Wok burner 3.3 kW
- Rear left: Economy burner 1 kW
- Center front: Economy burner 1 kW
- Center rear: Standard burner 1.7 kW
- Rear right: Standard burner 1.7 kW
- Front right: Wok burner 3.3 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1.5 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 53 x 915 x 520
- Required niche size for installation (HxWxD): 43 x 850 x 490

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

Built-in
Hobs
Gas hobs

90 cm

70 cm

70 cm

PCR915B90E

- 5 gas burners
- 1 dual wok burner
- 1 rapid, 2 standard, 1 economy burner
- Front left: Rapid burner 3 kW
- Rear left: Economy burner 1 kW
- Center: wok burner 4.5 KW
- Rear right: Standard burner 1.7 kW
- Front right: Standard burner 1.7 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1.5 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 53 x 915 x 520
- Required niche size for installation (HxWxD): 43 x 850 x 490

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PCQ715B90E

- 5 gas burners
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Front left: Economy burner 1 kW
- Rear left: Standard burner 1.7 kW
- Center: wok burner 4 kW
- Rear right: Rapid burner 3 kW
- Front right: Standard burner 1.7 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 52 x 702 x 520
- Required niche size for installation (HxWxD): 43 x 560 x 480

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

PCQ755FDE

- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Thermoelectric safety pilot.
- Knob ignition via control knobs
- Left: wok burner 4.5 KW
- Center front: Standard burner 1.75 kW
- Center rear: Standard burner 1.75 kW
- Rear right: Rapid burner 3 kW
- Front right: Economy burner 1 kW
- Cast iron pan supports with rubber feet
- Steel coloured controls
- Connecting cable 1.5 m with plug
- Preset of natural gas (20mbar)

TECHNICAL INFORMATION

- Electrical connection rating (W):
- Dimensions of the product (mm): 47 x 745 x 510
- Required niche size for installation (HxWxD): 40 x 560 x 480

Built-in
Hobs
Gas hobs

PCP615B90E

- 4 gas burners
- 1 rapid, 2 standard, 1 economy burner
- Front left: Standard burner 1.7 kW
- Rear left: Standard burner 1.7 kW
- Rear right: Rapid burner 3 kW
- Front right: Economy burner 1 kW
- Knob ignition via control knobs
- Flame failure safety device
- Cast iron pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 52 x 582 x 520
- Required niche size for installation (HxWxD): 43 x 560 x 480

OPTIONAL ACCESSORIES

HEZ298105 Simmer plate

NGT915ENE

- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Knob ignition via control knobs
- Flame failure safety device
- 3-piece enamelled pan supports with rubber feet
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included
- Connecting cable 1.5 m with plug
- Stainless steel effect controls

TECHNICAL INFORMATION

- Dimensions of the product (mm): 860 x 500
- Required niche size for installation (WxD): 840 x 480

INCLUDED ACCESSORIES

1 x cross support for espresso

NGU4151BT

- 4 gas burners
- 1 rapid, 2 standard, 1 economy burner
- Front left: Rapid burner 3 kW
- Rear left: Standard burner 1.7 kW
- Rear right: Standard burner 1.7 kW
- Front right: Economy burner 1 kW
- Ignition via control knob
- Flame failure safety device
- Steel pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 43.5 x 580 x 510
- Required niche size for installation (HxWxD): 33 x 560 x 490

Built-in
Hobs
Gas hobs

60 cm

60 cm

30 cm

NGU4051DE

- 1 rapid, 2 standard, 1 economy burner
- Front left: Rapid burner 3 kW
- Rear left: Standard burner 1.7 kW
- Rear right: Standard burner 1.7 kW
- Front right: Economy burner 1 kW
- Two hand ignition
- Steel pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1
- Dimensions of the product (mm): 43.5 x 580 x 510
- Required niche size for installation (HxWxD): 33 x 560 x 490

NMT635TNE

- 1 rapid, 1 standard, 1 economy burner, 1 electric cooking zone
- Knob ignition via control knobs
- Steel pan supports
- Connecting cable 1.5 m with plug
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 1000
- Dimensions of the product (mm): 43 x 580 x 510
- Required niche size for installation (HxWxD): 33 x 560 x 490

PCD345D

- 1 rapid, 1 economy burner
- Knob ignition via control knobs
- Flame failure safety device
- Steel pan supports
- Connecting cable 1.5 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Total connection load (gas): 4 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m
- Appliance dimensions (mm): 52 x 288 x 505
- Built-in dimensions (HxWxD): 42 x 268 x 490

Built-in
Hobs
Gas hobs

30 cm

PCH345D

- Wok burner
- Knob ignition via control knobs
- Flame failure safety device
- Steel pan supports
- Connecting cable 1 m
- Preset of natural gas (20mbar)
- Liquid gas nozzles (28-30/37mbar) included

TECHNICAL INFORMATION

- Total connection load (gas): 3.6 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m
- Appliance dimensions (mm): 52 x 288 x 505
- Built-in dimensions (HxWxD): 42 x 268 x 490

Hoods.

Island Hood

Give the finishing touch to kitchens with a hob built over a central island. Designed for ceiling installation, the hood is independent of surrounding fixtures, making it a focal point and a real style statement.

Wall-mounted Hood

Your kitchen is completely smoke and odour free with the range of wall-mounted hoods from Bosch. Designed for wall fittings, these aesthetically appealing hoods make your kitchen picture perfect.

Built-under Hood

With the same functionality as the wall mounted hood, the built-under hood is high on aesthetic scores as well. Unique in its design and high on efficiency, the built-under hood can be wall mounted or fitted below wall cupboards depending on the kitchen's layout.

Hoods
Features and benefits.

Design

Worktop lighting
Integral ‘day light’ halogen lighting ensures that the cooking area is clearly illuminated. They last twice as long and are more energy efficient than standard lights. Some models also feature a dimmer function.

Performance

Ducted extraction
Ducting out is the most effective method of extraction if the hood can be sited on an outside wall, or an outside wall can be reached via ducting.

Re-circulating extraction
If an outside wall cannot be reached the extractor can be set up for recirculating. Air is drawn into the appliance through the filters to neutralise odours and remove grease particles. The cleaned air is then returned to the kitchen. A carbon filter or recirculating kit is necessary for re-circulation (optional accessory).

Recirculating kit
Contains a carbon filter and any other necessary components to ensure that odour free air is returned into the kitchen. To ensure that the hood performance is maintained, the carbon filter should be replaced on a regular basis.

Metal filter
A metal filter provides the ultimate in filtering efficiency. The dishwasher-proof metal mesh requires periodic cleaning but can be used over and over again.

Paper grease filter
The print and stripe markings darken considerably when the disposable paper filter is saturated to indicate that it needs replacing.

Convenience

Variable power settings
All Bosch hoods feature multiple power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking in the kitchen area. Many hood models also feature an intensive extraction setting, which gives an extra boost to the performance of the hood when required.

After running
The hood automatically continues to run on, for approx ten minutes, after normal operation to ensure that any remaining vapours and odours are effectively whisked away. The hood then automatically switches off.

Automatic revert
When the intensive setting is selected it may be set to automatically revert back to a pre-defined normal level after a short period of time.

Built-in
Hoods
Ceiling hoods

100 cm

100 cm

100 cm

DIT109850

- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via metal touch
- 3-stage + intensive control
- Automatic revert
- Automatic 10 minutes after running
- Max. blower extraction rate 900 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 620 m³/h Intensive 820 m³/h
- Extraction rate free blowing: max. Normal 640 m³/h Intensive 860 m³/h
- Extraction rate free blowing max. 860 m³/h
- 4 x 20 W Halogen light
- SoftLight, Light dimmer function
- Rimm ventilation
- Filter cover stainless steel
- Dishwasher safe, metal grease filter with side extraction
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 620 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 340 W

TECHNICAL INFORMATION

- Connection Rating (W): 340
- Dimensions of the product, with chimney (if exists) (mm): 800-1100 x 1000 x 700

OPTIONAL ACCESSORIES

DHZ5285 Starter set

DIB105850

- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via push button controls with digital display
- 3-stage + intensive control
- Automatic revert
- Maximum extraction 820 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 620 m³/h Intensive 820 m³/h
- Extraction rate free blowing: max. Normal 640 m³/h Intensive 860 m³/h
- Extraction rate free blowing max. 860 m³/h
- 4 x 20 W Halogen light
- Rimm ventilation
- Filter cover stainless steel
- Dishwasher safe, metal grease filter with side extraction
- 120 or 150 mm diameter pipe
- Additional noise insulation
- Noise level on max. Normal 620 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 340 W

TECHNICAL INFORMATION

- Connection Rating (W): 340
- Dimensions of the product, with chimney (if exists) (mm): 750-1050 x 1000 x 700

OPTIONAL ACCESSORIES

DHZ5285 Starter set

DIA106750

- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Glass canopy
- Electronic via push button controls with digital display
- 3-stage + intensive control
- Automatic revert
- Operation from two sides possible
- 4 x 20 W Halogen light
- SoftLight, Light dimmer function
- Maximum extraction 720 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 500 m³/h Intensive 720 m³/h
- Extraction rate free blowing: max. Normal 530 m³/h Intensive 770 m³/h
- Extraction rate free blowing max. 770 m³/h
- Additional noise insulation
- Noise level on max. Normal 500 m³/h: 46 dB (A), complies 60 dB (A) re 1pW according to DIN/EN 60704-2-13
- Dishwasher safe metal grease filter with multi zone extraction
- 120 or 150 mm diameter pipe
- Saturation indicator for filter
- Power rating: 295 W

TECHNICAL INFORMATION

- Connection Rating (W): 295
- Dimensions of the product, with chimney (if exists) (mm): 772-1092 x 1000 x 700

OPTIONAL ACCESSORIES

DHZ5305 Starter set

Built-in
Hoods
Ceiling hoods

100 cm

DIK106750

- Suitable for ducted or re-circulated extraction
- Metal grease filter, dishwasher safe
- 3 x 20 W Halogen light
- Operation from two sides possible
- Electronic via on both sides with digital display
- 3-stage + intensive control
- Automatic revert
- Automatic 15 minutes after running
- Maximum extraction 780 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 470 m³/h Intensive 780 m³/h
- Extraction rate free blowing: max. Normal 480 m³/h Intensive 860 m³/h
- Extraction rate free blowing max. 860 m³/h
- Saturation indicator for filter
- Noise level on max. Normal 470 m³/h: 50 dB (A), complies 61 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 360 W

TECHNICAL INFORMATION

- Connection Rating (W): 360
- Dimensions of the product, with chimney (if exists) (mm): 900-1120 x 1000 x 887

Built-in
Hoods
Wall mounted hoods

120 cm

DWT126851

- Wall mounted hood
- Metal grease filter, dishwasher safe
- 4 x 20 W Halogen light
- Push button electronic controls
- 3-stage + intensive control
- Automatic revert
- Automatic 10 minutes after running
- Max. blower extraction rate 830 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 480 m³/h Intensive 800 m³/h
- Extraction rate free blowing: max. Normal 490 m³/h Intensive 860 m³/h
- Extraction rate free blowing max. 860 m³/h
- Noise level on max. Normal 480 m³/h: 50 dB (A), complies 61 dB (A) re 1pW according to DIN/EN 60704-2-13
- 120 or 150 mm diameter pipe
- Power rating: 380 W
- Saturation indicator for metal grease filter

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 720-990 x 1200 x 550

90 cm

DWT096850

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via Low-lift push buttons with digital display
- 3-stage + intensive control
- Automatic sensor: Yes
- Interval operation
- Automatic revert
- Automatic 10 minutes after running
- Max. blower extraction rate 900 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 620 m³/h Intensive 820 m³/h
- Extraction rate free blowing: max. Normal 640 m³/h Intensive 860 m³/h
- Extraction rate free blowing max. 860 m³/h
- 3 x 20 W Halogen light
- SoftLight, Light dimmer function
- Filter cover stainless steel, perforated and dishwasher safe
- Metal grease filter, dishwasher safe
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 620 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 320 W

TECHNICAL INFORMATION

- Connection Rating (W): 320
- Dimensions of the product, with chimney (if exists) (mm): 775-1220 x 900 x 520

OPTIONAL ACCESSORIES

DHZ5165 Re-circulating kit

Built-in
Hoods
Wall mounted hoods

90 cm

90 cm

90 cm

DWB096750

- Telescopic canopy
- Suitable for ducted or re-circulated extraction
- Metal grease filter, dishwasher safe
- Twin channel high performance fan motor
- 4 x 20 W Halogen light
- SoftLight, Light dimmer function
- Electronic via TouchControl with digital display
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back
- 3-stage + intensive control
- Automatic revert
- Automatic 10 minutes after running
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 500 m³/h Intensive 700 m³/h
- Extraction rate free blowing: max. Normal 520 m³/h Intensive 710 m³/h
- Max. blower extraction rate 720 m³/h
- Saturation indicator for filter
- 120 or 150 mm diameter pipe
- Power rating: 295 W
- Noise level on max. Normal 500 m³/h: 49 dB (A), complies 63 dB (A) re 1pW according to DIN/EN 60704-2-13

TECHNICAL INFORMATION

- Connection Rating (W): 295
- Dimensions of the product, with chimney (if exists) (mm): 753-1168 x 900 x 430

OPTIONAL ACCESSORIES

DHZ5165 Re-circulating kit

DWB099751

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via metal touch
- 3-stage + intensive control
- Automatic revert
- Maximum extraction 770 m³/h
- Automatic 10 minutes after running
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 650 m³/h Intensive 770 m³/h
- Extraction rate free blowing: max. Normal 670 m³/h Intensive 800 m³/h
- 3 x 20 W Halogen light
- SoftLight, Light dimmer function
- Light dimmer function
- Metal grease filter, dishwasher safe
- Saturation indicator for metal grease filter
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 650 m³/h: 51 dB (A), complies 65 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 310 W

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 653-1097 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

DWT093651

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Push buttons, backlighted for extractor speeds and light
- 3-stage + intensive control
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 500 m³/h Intensive 640 m³/h
- Extraction rate free blowing max. 660 m³/h
- 2 x 20 W Halogen light
- Metal grease filter, dishwasher safe
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 500 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 240 W

TECHNICAL INFORMATION

- Connection Rating (W): 240
- Dimensions of the product, with chimney (if exists) (mm): 640-1084 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

Built-in
Hoods
Wall mounted hoods

90 cm

90 cm

90 cm

DWB095750

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via Low-lift push buttons with digital display
- 3-stage + intensive control
- Automatic revert
- Max. blower extraction rate 830 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 650 m³/h Intensive 770 m³/h
- Extraction rate free blowing max. 800 m³/h
- Extraction rate free blowing: max. Normal 670 m³/h, Intensive 800 m³/h
- 3 x 20 W Halogen light
- Metal grease filter, dishwasher safe
- 120 or 150 mm diameter pipe
- Power rating: 310 W
- Noise level on max. Normal 650 m³/h: 51 dB (A), complies 65 dB (A) re 1pW according to DIN/EN 60704-2-13

TECHNICAL INFORMATION

- Connection Rating (W): 310
- Dimensions of the product, with chimney (if exists) (mm): 625-1069 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

DWW093651

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Push buttons, backlighted for extractor speeds and light
- 3-stage + intensive control
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 500 m³/h Intensive 640 m³/h
- Extraction rate free blowing: max. Normal 510 m³/h Intensive 660 m³/h
- Extraction rate free blowing max. 660 m³/h
- 2 x 20 W Halogen light
- Metal grease filter, dishwasher safe
- Power rating: 240 W
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 500 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 670-1100 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

DWW096851

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Electronic via Low-lift push buttons with digital display
- 3-stage + intensive control
- Automatic sensor: Yes
- Interval operation
- Automatic revert
- Automatic 10 minutes after running
- Maximum extraction 820 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 620 m³/h Intensive 820 m³/h
- Extraction rate free blowing: max. Normal 640 m³/h Intensive 860 m³/h
- Max. blower extraction rate 900 m³/h
- 3 x 20 W Halogen light
- SoftLight, Light dimmer function
- Filter cover stainless steel, perforated and dishwasher safe
- Metal grease filter, dishwasher safe
- Saturation indicator for filter
- Power rating: 320 W
- 120 or 150 mm diameter pipe
- Additional noise insulation
- Noise level on max. Normal 620 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 775-1220 x 900 x 520

OPTIONAL ACCESSORIES

DHZ5165 Re-circulating kit

Built-in
Hoods
Wall mounted hoods

90 cm

90 cm

90 cm

DWK096751

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Rimm ventilation
- Filter cover stainless steel
- Metal grease filter, dishwasher safe
- 3 x 20 W Halogen light
- Electronic via Low-lift push buttons with digital display
- 4 speeds plus intensive operation control
- Automatic revert
- Automatic 30 minutes after running
- Maximum extraction 740 m³/h
- Ducted extraction rate according to DIN/EN ø 15 cm: max. Normal 680 m³/h Intensive 740 m³/h
- Extraction rate free blowing: max. Normal 710 m³/h Intensive 790 m³/h
- Extraction rate free blowing: max. 790 m³/h
- Saturation indicator for filter
- Noise level on max. Normal 680 m³/h : 53 dB (A) complies 65 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 400 W
- 120 or 150 mm diameter pipe

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 1100-1420 x 900 x 455

OPTIONAL ACCESSORIES

DHZ5475 Starter set

DWK096651

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Metal grease filter, dishwasher safe
- 3 x 20 W Halogen light
- Electronic via Low-lift push buttons with digital display
- 4 speeds plus intensive operation control
- Automatic revert
- Maximum extraction 690 m³/h
- Ducted extraction rate according to DIN/EN ø 15 cm: max. Normal 570 m³/h Intensive 690 m³/h
- Extraction rate free blowing: max. Normal 590 m³/h Intensive 720 m³/h
- Extraction rate free blowing: max. 720 m³/h
- Automatic 30 minutes after running
- Saturation indicator for filter
- Noise level on max. Normal 570 m³/h : 51 dB (A) complies 63 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 310 W
- 120 or 150 mm diameter pipe

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 930-1240 x 900 x 492

OPTIONAL ACCESSORIES

DHZ5455 Starter set

DWK093650

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- 2 x 20 W Halogen light
- Twin channel high performance fan motor
- Push buttons for extractor speeds and light
- 3 speeds control
- Maximum extraction 680 m³/h
- Extraction rate free blowing max. 710 m³/h
- Metal grease filter, dishwasher safe
- Noise level on max. normal 680 m³/h: 56 dB (A), complies 67 dB (A) re 1 pW according to DIN/EN 60704-2-13
- Power rating: 290 W
- 120 mm diameter pipe

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 1000-1330 x 900 x 390

OPTIONAL ACCESSORIES

DHZ5475 Starter set

Built-in
Hoods
Wall mounted hoods

90 cm

90 cm

90 cm

DWK096650

- Wall mounted hood
- Suitable for ducted operation
- Dishwasher safe metal grease filters
- 3 x 20 W Halogen light
- SoftLight
- Light dimmer function
- Electronic via push button controls with digital display
- 3-stage + intensive control
- Automatic revert
- Automatic 10 minutes after running
- Maximum extraction 620 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 380 m³/h Intensive 620 m³/h
- Extraction rate free blowing: max. 640 m³/h
- Extraction rate free blowing: max. Normal 400 m³/h Intensive 640 m³/h
- Saturation indicator for metal grease filter
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 380 m³/h: 40 dB (A), complies 54 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 220 W

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 800-1080 x 900 x 480

DWK096652

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Rimm ventilation
- Filter cover stainless steel
- Metal grease filter, dishwasher safe
- Push button electronic controls
- 3-stage + intensive control
- 2 x 20 W Halogen light
- Automatic revert
- Automatic 5 minutes after running
- Maximum extraction 670 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 510 m³/h Intensive 670 m³/h
- Extraction rate free blowing: max. Normal 540 m³/h Intensive 700 m³/h
- Extraction rate free blowing: max. 700 m³/h
- Saturation indicator for filter
- Noise level on max. Normal 510 m³/h: 58 dB (A), complies 65 dB (A) re 1pW according to DIN/EN 60704-2-13
- 150 mm diameter pipe
- Power rating: 290 W

TECHNICAL INFORMATION

- Connection Rating (W): 290
- Dimensions of the product, with chimney (if exists) (mm): 1005-1445 x 800 x 390

OPTIONAL ACCESSORIES

DHZ5485 Starter set

DWA095551

- Wall mounted hood
- Glass canopy with aluminium frame
- Suitable for ducted or re-circulated extraction
- Dishwasher safe metal grease filter with multizone extraction
- 2 x 20 W Halogen light
- Electronic via Low-lift push buttons with digital display
- 3-stage + intensive control
- Automatic revert
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 400 m³/h Intensive 550 m³/h
- Extraction rate free blowing: max. 580 m³/h
- Extraction rate free blowing: max. Normal 430 m³/h Intensive 580 m³/h
- Noise level on max. Normal 400 m³/h: 44 dB (A), complies 58 dB (A) re 1pW according to DIN/EN 60704-2-13
- 120 or 150 mm diameter pipe
- Power rating: 240 W
- Maximum extraction 550 m³/h

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 808-1190 x 900 x 520

OPTIONAL ACCESSORIES

DHZ5185 Re-circulating kit

Built-in
Hoods
Wall mounted hoods

90 cm

90 cm

90 cm

DWA093552

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Push buttons, backlighted for extractor speeds and light
- 3-stage + intensive control
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 490 m³/h Intensive 620 m³/h
- Extraction rate free blowing: max. Normal 500 m³/h Intensive 640 m³/h
- Extraction rate free blowing: max. 640 m³/h
- 2 x 20 W Halogen light
- Metal grease filter, dishwasher safe
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 490 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 240 W

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 631-1075 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

DWA096550

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Dishwasher safe metal grease filter with multizone extraction
- 2 x 20 W Halogen light
- SoftLight, Light dimmer function
- Electronic via push button controls with digital display
- 3-stage + intensive control
- Automatic revert
- Automatic 10 minutes after running
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 470 m³/h Intensive 590 m³/h
- Extraction rate free blowing: max. 630 m³/h
- Extraction rate free blowing: max. Normal 490 m³/h Intensive 630 m³/h
- Saturation indicator for filter
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 470 m³/h: 48 dB (A), complies 62 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 240 W

TECHNICAL INFORMATION

- Connection Rating (W): 240
- Dimensions of the product, with chimney (if exists) (mm): 740-1170 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5185 Re-circulating kit

DWA091450

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Slide switch for extractor speeds and light
- 3 speed control
- Metal grease filter, dishwasher safe
- 2 x 20 W Halogen light
- Extraction rate free blowing max. 420 m³/h
- Noise level on max. normal 400 m³/h: 59 dB (A), complies 67 dB (A) re 1 pW according to DIN/EN 60704-2-13
- 120 mm diameter pipe
- Power rating: 210 W

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 887-1170 x 900 x 525

OPTIONAL ACCESSORIES

DHZ5215 Re-circulating kit

Built-in
Hoods
Wall mounted hoods

90 cm

60 cm

60 cm

DWW091451

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Slide switch for extractor speeds and light
- 3 speed control
- Max. blower extraction rate 440 m³/h
- Extraction rate free blowing max. 420 m³/h
- 2 x 40 W lights
- Metal grease filter, dishwasher safe
- Noise level on max. normal 400 m³/h: 53 dB (A), complies 67 dB (A) re 1 pW according to DIN/EN 60704-2-13
- Power rating: 260 W
- 120 mm diameter pipe
- Maximum extraction 400 m³/h

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 793-970 x 900 x 500

OPTIONAL ACCESSORIES

DHZ5145 Re-circulating kit

DWW063651

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Push buttons, backlighted for extractor speeds and light
- 3-stage + intensive control
- Max. blower extraction rate 680 m³/h
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 500 m³/h Intensive 640 m³/h
- Extraction rate free blowing: max. Normal 510 m³/h Intensive 660 m³/h
- 2 x 20 W Halogen light
- Metal grease filter, dishwasher safe
- Power rating: 240 W
- 120 or 150 mm diameter pipe
- Noise level on max. Normal 500 m³/h: 45 dB (A), complies 59 dB (A) re 1pW according to DIN/EN 60704-2-13

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 670-1100 x 600 x 500

OPTIONAL ACCESSORIES

DHZ5225 Starter set

DWB065450

- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- 2 x 20 W Halogen light
- Electronic via push button controls with digital display
- 3 speed control
- Maximum extraction 400 m³/h
- Extraction rate free blowing max. 420 m³/h
- Metal grease filter, dishwasher safe
- Noise level on max. normal 400 m³/h: 52 dB (A), complies 66 dB (A) re 1 pW according to DIN/EN 60704-2-13
- 120 mm diameter pipe
- Max. blower extraction rate 440 m³/h
- Power rating: 220 W

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 775-1179 x 600 x 500

OPTIONAL ACCESSORIES

DHZ5105 Starter kit

Built-in
Hoods
Built-under hoods

90 cm

90 cm

90 cm

DHU932UEU

- Suitable for ducted or re-circulated extraction
- For installation underneath a wall cupboard or on the wall
- 3-stage + intensive control
- Push buttons for extractor speeds and light
- Twin motor
- Metal grease filter, dishwasher safe
- Adjustable glass visor
- 2 x 40 W light
- Maximum extraction 380 m³/h
- Extraction rate free blowing: max. Normal 330 m³/h Intensive 400 m³/h
- Noise level on max. normal 300 m³/h: 54 dB (A), complies 66 dB (A) re 1 pW according to DIN/EN 60704-2-13
- Power rating: 340 W
- 100 or 120 mm diameter pipe

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 140 x 898 x 510

OPTIONAL ACCESSORIES

DHZ1100	Charcoal filter for re-circulation operation

DHU935HME

- For installation underneath a wall cupboard or on the wall
- Suitable for ducted or re-circulated extraction
- Metal grease filter, dishwasher safe
- Charcoal cassette filter
- Twin motor
- 3 speed control
- Extraction rate according to EN 61591 max. 420 m³/h
- Extraction rate free blowing: max. 480 m³/h
- Noise level according to DIN/EN 60704-2-13: 63 dB (re1pW) on max. Normal 420 m³/h
- 2 x 40 W light

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 135 x 900 x 495

DHU932GME

- For installation underneath a wall cupboard or on the wall
- Suitable for ducted or re-circulated extraction
- Paper grease filter
- Charcoal cassette filter
- Single motor
- 3 speed control
- Extraction rate according to EN 61591 max. 285 m³/h
- Extraction rate free blowing: max. 320 m³/h
- Noise level according to DIN/EN 60704-2-13: 57 dB (re1pW) on max. Normal 285 m³/h
- 2 x 40 W light

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 135 x 900 x 495

Built-in
Hoods
Built-under hoods

60 cm

60 cm

60 cm

DHU635GZA

- For installation underneath a wall cupboard or on the wall
- Suitable for ducted or re-circulated extraction
- Charcoal cassette filter
- Twin motor
- 3 speed control
- Extraction rate according to EN 61591 max. 420 m³/h
- Extraction rate free blowing max. 480 m³/h
- Noise level according to DIN/EN 60704-2-13: 63 dB (re1pW) on max. Normal 420 m³/h
- 2 x 40 W light

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 135 x 600 x 495

DHU625P

- Suitable for ducted or re-circulated extraction
- For installation underneath a wall cupboard or on the wall
- 2-setting radial-fan
- Rocker switches for extractor speed and light
- Paper grease filter with saturation indicator
- Adjustable glass visor
- 1 x 40 W light
- Extraction rate free blowing max. 210 m³/h
- Maximum extraction 180 m³/h
- Noise level on max. Normal 180 m³/h: 54 dB (A), complies 66 dB (A) re 1pW according to DIN/EN 60704-2-13
- Power rating: 130 W
- 100 or 120 mm diameter pipe

TECHNICAL INFORMATION

- Dimensions of the product, with chimney (if exists) (mm): 140 x 598 x 510

OPTIONAL ACCESSORIES

DHZ1100	Charcoal filter for re-circulation operation
DHZ1610	Metal grease filter

DHU632GME

- Optional exhaust air or re-circulation mode
- Fleece grease filter
- Active carbon filter for re-circulation mode
- Worktop lighting: 2 x 40 W bulbs
- Maximum venting capacity: 285 m³/hr
- 3 power settings
- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm
- Active carbon filter: ID 366302

TECHNICAL INFORMATION

- Total connected load: 210 W
- Frequency: 50Hz - 60Hz
- Length of connecting cable: 1.5 m
- Exhaust air (HxWxD) 13.5 x 60.0 x 49.5 cm
- Re-circulation (HxWxD) 13.5 x 60.0 x 49.5 cm

Range of free-standing cookers.

Our beautiful state-of-the-art range cookers
will provide a focal point for any kitchen,
whether slot in or stand-alone.

Freestanding
Cooker
Gas Cookers

100 cm

HSH23505ME

- Gas hob stainless steel (4 cm hob top height)
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flame failure safety device
- Cast iron pan supports with rubber feet
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Splashback
- Conventional gas oven
- Operating methods: Gas bottom heating, Gas top/bottom heat, rotisserie, Centre-area grill/broiler
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Glass door with stainless steel design
- Glass inner door profil (Triple glazed door)
- Catalytic self cleaning (Rear wall and Side walls)
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 850 x 1000 x 600
- Gross Weight (kg): 92

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

90 cm

HSG2360ME

- Gas hob stainless steel (3 cm height)
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flame failure safety device
- Cast iron pan supports with rubber feet
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Splashback
- Conventional gas oven
- Operating methods: rotisserie, Gas top/bottom heat, Centre-area grill/broiler, Gas bottom heating
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Glass door with stainless steel design
- Glass inner door profil (Triple glazed door)
- Catalytic self cleaning (Rear wall and Side walls)
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 75

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

90 cm

HSG2160ME

- Gas hob stainless steel (2,5 cm height)
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flame failure safety device
- Cast iron pan supports with rubber feet
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Glass coverlid
- Conventional gas oven
- Operating methods: rotisserie, Gas top/bottom heat, Gas bottom heating, Centre-area grill/broiler
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Glass door with stainless steel design
- Glass inner door profil (Triple glazed door)
- Catalytic self cleaning (Rear wall and Side walls)
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 81

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

Freestanding
Cooker
Gas Cookers

90 cm

90 cm

90 cm

HSG2130ME

- White enamelled gas hob
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flame failure safety device
- Cast iron pan supports with rubber feet
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Glass coverlid
- Conventional gas oven
- Operating methods: Gas bottom heating, Gas top/bottom heat, rotisserie, Centre-area grill/broiler
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Glass inner door profil (Triple glazed door)
- Catalytic self cleaning (Rear wall and Side walls)
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 81

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

HSG2060CME

- Gas hob stainless steel (2,5 cm height)
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flat steel enamelled pan supports
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Glass coverlid
- Conventional gas oven
- Operating methods: Gas bottom heating, rotisserie, Centre-area grill/broiler, Gas top/bottom heat
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 71

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

HSG2060AME

- Mixed hob stainless steel
- 1 high speed, 2 standard, 1 economy burner, 2 hotplates
- Electric Ignition via control knob
- Flame failure safety device
- Flat steel enamelled pan supports
- Number of pan supports: 2 double pan supports
- Glass coverlid
- Conventional gas oven
- Operating methods: Gas top/bottom heat, rotisserie, Gas bottom heating, Centre-area grill/broiler
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Catalytic self cleaning (Rear wall and Side walls)
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 71

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid, 1 x cross support for espresso

Freestanding
Cooker
Gas Cookers

90 cm

60 cm

60 cm

HSG193510ME

- Gas hob stainless steel (2,5 cm height)
- 1 rapid, 2 standard, 1 economy, 1 wok burner
- Electric Ignition via control knob
- Flat steel enamelled pan supports
- Number of pan supports: 2 double pan supports, 1 single pan supports
- Glass coverlid
- Conventional gas oven
- Operating methods: Centre-area grill/broiler, rotisserie, Gas bottom heating
- Cooker ignition with Knob ignition
- Thermoelectric ignition
- Grill heating element: Gas
- Storage compartment
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 880 x 900 x 600
- Gross Weight (kg): 71

INCLUDED ACCESSORIES

1 x enamel baking tray,
1 x grid, 1 x cross support for espresso

HSG342050U

- Burners: 2 standard, 1 economy, 1 wok
- Two hand ignition via control knobs
- 2-piece steel pan supports with rubber feet
- Glass cover lid
- Extra large capacity oven with grey enamel
- Gas oven
- Electric grill
- Rotary spit
- Oven illumination
- Electronic timer
- Drawer for kitchen utensils
- Adjustable feet
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Electrical connection rating (W): 2350
- Dimensions of the product (mm): 850 x 600 x 600

INCLUDED ACCESSORIES

1 x grid
1 x enamel baking tray

HSG222020Z

- Burners: 2 standard, 1 economy, 1 rapid
- Two hand ignition via control knobs
- 2-piece steel pan supports with rubber feet
- Metal cover lid
- Extra large capacity oven with grey enamel
- Gas oven
- Gas grill
- Oven illumination
- Drawer for kitchen utensils
- Adjustable feet
- Preset of liquid gas (28-30/37mbar)
- Natural gas nozzles (20 mbar) included

TECHNICAL INFORMATION

- Dimensions of the product (mm): 850 x 600 x 600

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid

Freestanding
Cooker
Electric Cookers

Freestanding
Cookers
Microwave oven

HLN443220F

- Ceramic hob
- 4 infinitely variable QuickTherm cooking zones including 1 dual circuit cooking zone
- Front left: Standard zone 1.2 kW
- Rear left: Dual-circuit cooking zone 2.2 kW, 0.75 kW
- Rear right: Standard zone 1.2 kW
- Front right: Standard zone 1.8 kW
- 4-fold residual heat display
- Extra large capacity oven (58 lts.) with grey enamel
- Multifunction3D Comfort heating system
- Top/bottom heat, 3D-hot air, Pizza setting, Bottom heat, hot air grilling, Full width variable grill, Defrost setting
- Rotary spit
- Shelf support rails
- Rapid heating up
- Catalytic oven cavity (rear and side walls)
- Oven illumination
- Electronic clock
- Child safety lock: key function
- Retractable controls
- Full glass inner door
- Drawer for kitchen utensils
- Adjustable feet

TECHNICAL INFORMATION

- Electrical connection rating (W): 9700
- Dimensions of the product (mm): 850 x 600 x 600

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid

HSN421120

- Hob with 2 high-speed and 2 standard hotplates
- Front left: High speed plate 2 kW
- Rear left: Standard zone 1 kW
- Rear right: Standard zone 2 kW
- Front right: High speed plate 1.5 kW
- Extra large capacity oven (58 lts.) with grey enamel
- Multifunction3D Comfort heating system
- Top/bottom heat, 3D-hot air, Pizza setting, Bottom heat, hot air grilling, Full width variable grill, Half width variable grill, Defrost setting
- Shelf support rails
- Rapid heating up
- Catalytic rear panel
- Oven illumination
- Full glass inner door
- Drawer for kitchen utensils
- Adjustable feet

TECHNICAL INFORMATION

- Electrical connection rating (W): 9800
- Dimensions of the product (mm): 850 x 600 x 600

INCLUDED ACCESSORIES

1 x enamel baking tray
1 x grid
1 x universal pan

HMT75G451

- User-friendly electronics with push-buttons and pop-out control.
- 800 W Microwave
- 5 settings: 800 W, 600 W, 360 W, 180 W, 90 W
- Grill 1000 W
- Combination of Grill and Microwave power levels 360/180/90 W
- 8 automatic programming
- 4 defrost programs
- 3 cooking programs
- 8 combi programs
- Memory-Function (1 setting)
- Large digital display for displaying cooking times and time of day
- Capacity 17 lts. Stainless steel
- Turn table 24.5 cm Glass
- Out put power 1.27 kW
- Power cord with plug 130 cm

TECHNICAL INFORMATION

- Dimensions of the product (mm): 290 x 462 x 320

INCLUDED ACCESSORIES

1 x grid

Regional Headquarters:
Middle East, Africa and South Asia
BSH Home Appliances FZE
P.O. Box 17312, Jebel Ali
Dubai, UAE

BOBI10009

www.bosch-household.ae

BOSCH
Invented for life